

LIGHTNING PROTECTION DO-IT-YOURSELF KIT



HOME • FARM • SMALL COMMERCIAL
INSTALLATION INSTRUCTIONS INCLUDED

Ellipsoid SYSTEM 10000



#LPA-10000 PROVIDES LIGHTNING PROTECTION FOR STRUCTURES
EASY-TO-INSTALL DESIGN

KIT #LPA1000KIT		
LIST OF COMPONENTS		
QTY.	PART NAME	CATALOG NUMBER
1	ELLIPSOID 10000 AIR TERMINAL (LIGHTNING ROD)	LPA-10000
1	5/8" x 8'-0" ALUMINUM ROD (MAST)	LPA-2010-5/8-8A
1	SADDLE BASE	ABHB-15
1	4'-0" GALVANIZED TRIPOD BRACE	GSHB-20-48
90 FT.	ALUMINUM CABLE	ACHB-24-14
25	ALUMINUM CABLE FASTENER (SMALL HOLE) AND NAIL	AFHB-67, 65SS
30	ALUMINUM CABLE FASTENER (LARGE HOLE) AND MASONRY ANCHOR (FOR CHIMNEY INSTALLATION)	AFHB-66
1	WATERLINE CONNECTOR	PMHB-103D
1	ALUMINUM TEE CABLE SPLICER	ANHB-14
1	ELECTRIC SERVICE GROUND CONNECTOR	CNHB-44D
1	COPPER TEE CABLE SPLICER	CNHB-14
1	BIMETAL CONNECTOR	MNHB-93
40 FT.	COPPER GROUNDING CABLE	CCHB-17-14
7	COPPER CABLE FASTENER (LARGE HOLE)	CFHB-64
22	STAINLESS STEEL SCREW	SFHB-80SS
3	5/8" x 8'-0" COPPERBOND GROUND ROD	CGHB-106GR-8
3	GROUND ROD CONNECTOR	CGHB-57D
1	VERTICAL BASE (FOR ATTACHING MAST TO CHIMNEY)	ABHB-22

- Manufacturer's installation standard HBP-21 level 3 requires one (1) Ellipsoid 10000 to be installed on the roof for every circular area of 70,650 sq. ft. Structures shall not exceed 75 ft. in height, and the ESE lightning protection system must comply with all other requirements within the Manufacturer's Installation Standard HBP-21.
- The recommended number and placement of air terminals is based solely on Heary Bros.' 30 years of experience, and its air terminal and the configuration of those terminals have not been scientifically proven or guaranteed to have a measurable zone of protection.
- Ground resistance shall not exceed 25 ohms.
- Aluminum lightning protection components shall not be installed directly on copper surfaces or other non-compatible surfaces.
- Surge arrestors are recommended for electric, electronic equipment, television, cable TV, security alarms (burglar & fire).
- Surge arrestors are not included in this package.
- Any metal parts of electric equipment shall be kept at least 6 ft. away from lightning cables or they shall be bonded to the lightning protection cables at the location where the separation distance is less than 6 ft. Refer to National Electrical Code (NEC 70), article 150-46, 1996 edition.



MADE IN USA



Lightning Preventor of America

(A division of Heary Bros. Lightning Protection Co., Inc.)

11291 Moore Road, Springville, NY 14141 USA Telephone: 716-941-6145 Fax: 716-941-3828
Email: sales@lightningpreventor.com VISIT OUR WEBSITE www.lightningpreventor.com

ELLIPSOID SYSTEM 10000






INSTALLATION INSTRUCTIONS

(KIT INCLUDES MATERIALS FOR RIDGE OR CHIMNEY INSTALLATION)

•LIGHTNING MAST SHALL BE INSTALLED ON THE HIGHEST ELEVATION


NOTES:

1. ALL BOLTS ON BOLT PRESSURE CONNECTORS SHALL BE TORQUED AT 150 POUND-INCHES (17N m)
2. ALL CONNECTIONS MUST BE USED WITH UL LISTED CLASS I OR CLASS II CABLE OF SAME METAL TYPE

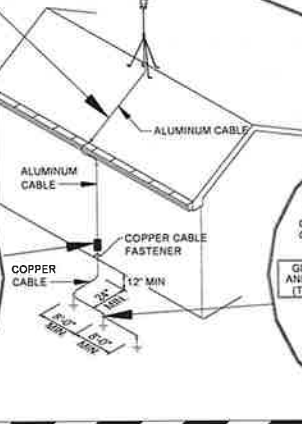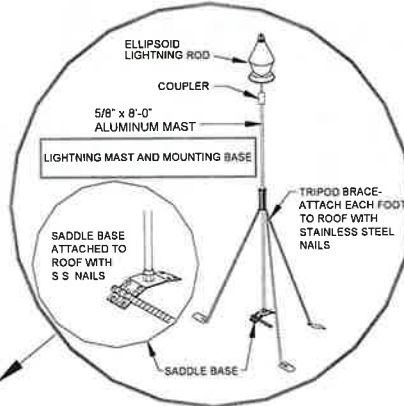



CAUTION: BEFORE DRIVING GROUND RODS DETERMINE LOCATION OF ALL UNDERGROUND UTILITIES: POWER, WATER, GAS, ELECTRIC, COMMUNICATIONS, ETC.

RIDGE INSTALLATION


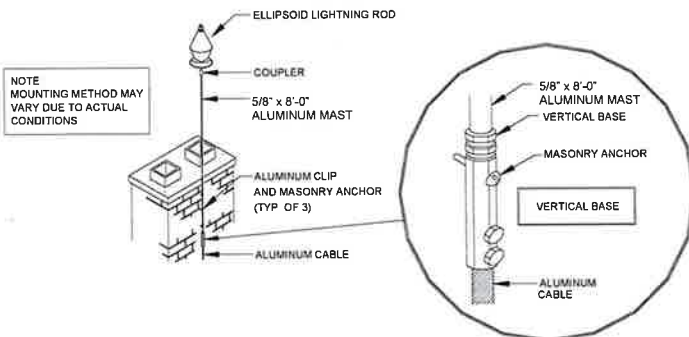


NOTE MOUNTING METHOD MAY VARY DUE TO ACTUAL CONDITIONS

CHIMNEY INSTALLATION



PROPER HANDLING OF ELLIPSOID AIR TERMINAL



LIGHTNING PREVENTOR OF AMERICA

A Division of Heary Bros. Lightning Protection Co., Inc.

11291 Moore Road, Springville, NY USA 14141 T. 800-421-6141 F. 716-941-3828

VISIT OUR WEBSITE: www.lightningpreventor.com